

OPB1250-45(54)A6DxR

1.25Gb/s BiDi SFP Transceiver, SMF, 1490nm-TX/1550nm-RX or 1550nm-TX/1490nm-RX, 140~160km

Features

- Supports 1.25Gbps/1.0625Gbps bit rates
- Bi-Directional LC connector
- Hot pluggable SFP footprint
- 1490nm DFB laser and 1550nm APD photo detector
- 1550nm DFB laser and 1490nm APD photo detector
- Applicable for 140km to 160km SMF connection
- Low power consumption < 1.0W
- Compliant with SFP MSA and SFF-8472
- Very low EMI and excellent ESD protection
- ROHS compliant and Lead Free
- Operating Temperature: Standard 0~70°C, Industrial -40~85°C
- Support Digital Diagnostic Monitor Interface



Applications


- 1G Fiber Channel, Switch to Switch Interface
- Gigabit Ethernet, Switched Backplane Applications
- Broadband aggregation and wireless infrastructure
- Router/Server Interface
- Other Optical networking

Description

Optcore OPB1250-45(54)A6DxR family are high performance, cost effective SFP BiDi modules supporting dual data-rate of 1.25Gbps/1.0625Gbps and 140km~160km transmission distance with SMF. The transceiver consists of three sections: a DFB laser transmitter, a APD photodiode integrated with a trans-impedance preamplifier (TIA) and MCU control unit. All modules satisfy class I laser safety requirements. The transceivers are compatible with the SFP Multi-Source Agreement (MSA) and SFF-8472. For further information, please refer to SFP MSA.

There are two versions of 1G SFP BiDi 160km transceiver modules for different applications. The Standard grade (0~70°C) is commonly used for commercial applications, and the Industrial grade (-40~85°C) is made with robust and reliable components to meet the needs of Industrial Ethernet applications under harsh environmental conditions.

Functional Diagram

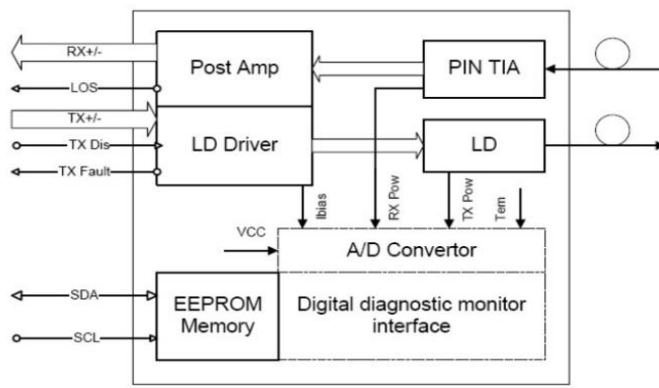

Absolute Maximum Ratings

Parameter	Symbol	Min	Max	Unit	Notes
Maximum Supply Voltage	V _{cc}	-0.5	4.0	V	
Storage Temperature	T _s	-40	85	°C	
Operating Humidity	RH	5	85	%	

Recommended Operating Conditions

Parameter	Symbol	Min.	Typ.	Max.	Unit	Notes
Power Supply Voltage	V _{cc}	3.13	3.3	3.47	V	
Power Supply Current	I _{cc}			280	mA	
Case Operating Temperature	T _c	0		70	°C	Standard
		-40		85	°C	Industrial
Data Rate			1.25		Gbps	Gigabit Ethernet
			1.06		Gbps	Fiber Channel
Transmission Distance			140	160	km	9/125μm SMF

Optical Characteristics

Parameter	Symbol	Min.	Typ	Max.	Unit	Note
Transmitter						
Operating Wavelength	λ	1470	1490	1510	nm	OPB1250-45A6DxR
		1510	1550	1570		OPB1250-54A6DxR
Ave. output power (Enabled)	P _{AVE}	1		6	dBm	1
Extinction Ratio	ER	9			dB	1
Side-Mode Suppression Ratio	SMSR	30			dB	
RMS spectral width	$\Delta\lambda$			1	nm	
Rise/Fall time (20%~80%)	Tr/Tf			0.26	ns	2
Dispersion penalty	TDP			3.9	dB	
Output Optical Eye	Compliant with IEEE802.3 z (class 1 Laser safety)					
Receiver						
Operating Wavelength	λ	1510	1550	1570	nm	OPB1250-45A6DxR
		1470	1490	1510		OPB1250-54A6DxR
Receiver Sensitivity	P _{SEN1}			-34	dBm	3
Overload	P _{AVE}	-9			dBm	3
LOS Assert	Pa	-40			dBm	
LOS De-assert	Pd			-35	dBm	
LOS Hysteresis	Pd-Pa	0.5			dB	

Note :

1. Measured at 1.25Gbps with PRBS 2⁷- 1 NRZ test pattern.
2. Unfiltered, measured with a PRBS 2⁷-1 test pattern @1.25Gbps

3. Measured at 1250 Mb/s with PRBS 2⁷– 1 NRZ test pattern for BER < 1x10⁻¹²


Electrical Characteristics (T_{OP(C)} = 0 to 70°C, T_{OP(I)} = -40 to 85°C, V_{CC} = 3.13 to 3.47 V)

Parameter	Symbol	Min.	Typ	Max.	Unit	Note
Transmitter						
Differential data input swing	VIN,PP	120		820	mVpp	1
Tx Disable Input-High	VIH	2.0		Vcc+0.3	V	
Tx Disable Input-Low	VIL	0		0.8	V	
Tx Fault Output-High	VOH	2.0		Vcc+0.3	V	2
Tx Fault Output-Low	VOL	0		0.8	V	2
Input differential impedance	Rin		100		Ω	
Receiver						
Differential data output swing	Vout,pp	340	650	800	mVpp	3
Rx LOS Output-High	VROH	2.0		Vcc+0.3	V	2
Rx LOS Output-Low	VROL	0		0.8	V	2

Notes:

1. TD+/- are internally AC coupled with 100Ω differential termination inside the module.
2. Tx Fault and Rx LOS are open collector outputs, which should be pulled up with 4.7k to 10kΩ resistors on the host board. Pull up voltage between 2.0V and Vcc+0.3V.
3. RD+/- outputs are internally AC coupled, and should be terminated with 100Ω (differential) at the user SERDES.

Pin Definitions

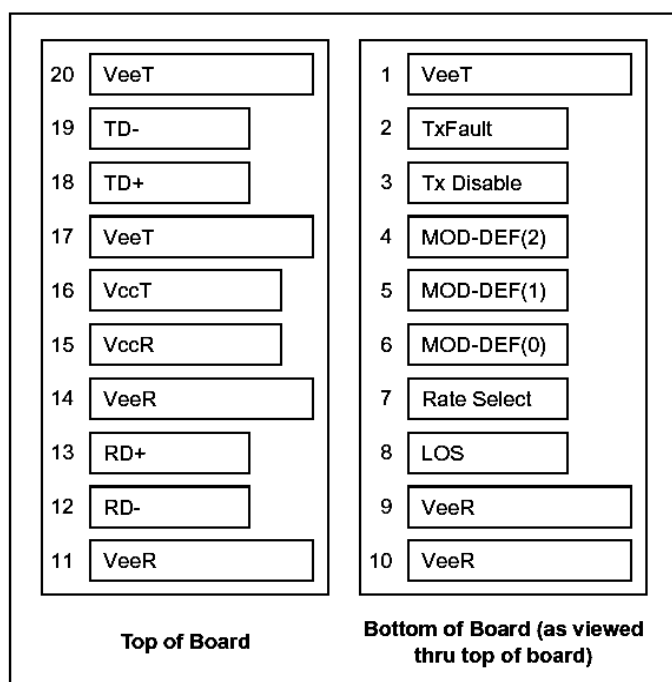

Pin Descriptions

Pin	Signal Name	Description	Plug Seq.	Notes
1	V _{EET}	Transmitter Ground	1	

2	TX FAULT	Transmitter Fault Indication	3	Note 1
3	TX DISABLE	Transmitter Disable	3	Note 2
4	MOD_DEF(2)	SDA Serial Data Signal	3	Note 3
5	MOD_DEF(1)	SCL Serial Clock Signal	3	Note 3
6	MOD_DEF(0)	Model present indication	3	Note 3
7	Rate Select	Not Connected	3	
8	LOS	Loss of Signal	3	Note 4
9	V _{EER}	Receiver ground	1	
10	V _{EER}	Receiver ground	1	
11	V _{EER}	Receiver ground	1	
12	RD-	Inverse Received Data Out	3	Note 5
13	RD+	Received Data Out	3	Note 5
14	V _{EER}	Receiver ground	1	
15	V _{CCR}	Receiver Power Supply	2	
16	V _{CCT}	Transmitter Power Supply	2	
17	V _{EET}	Transmitter Ground	1	
18	TD+	Transmit Data In	3	Note 6
19	TD-	Inv. Transmit Data In	3	Note 6
20	V _{EET}	Transmitter Ground	1	

Notes:

- TX Fault is an open collector output, which should be pulled up with a 4.7k~10kΩ resistor on the host board to a voltage between 2.0V and Vcc+0.3V. Logic 0 indicates normal operation; Logic 1 indicates a laser fault of some kind. In the low state, the output will be pulled to less than 0.8V.
- TX Disable is an input that is used to shut down the transmitter optical output. It is pulled up within the module with a 4.7k~10kΩ resistor. Its states are:
Low (0 to 0.8V): Transmitter on (>0.8V, < 2.0V): Undefined
High (2.0 to 3.465V): Transmitter Disabled Open: Transmitter Disabled
- Mod-Def 0,1,2. These are the module definition pins. They should be pulled up with a 4.7k~10kΩ resistor on the host board. The pull-up voltage shall be VccT or VccR.
Mod-Def 0 is grounded by the module to indicate that the module is present
Mod-Def 1 is the clock line of two wire serial interface for serial ID
Mod-Def 2 is the data line of two wire serial interface for serial ID
- LOS is an open collector output, which should be pulled up with a 4.7k~10kΩ resistor. Pull up voltage between 2.0V and Vcc+0.3V. Logic 1 indicates loss of signal; Logic 0 indicates normal operation. In the low state, the output will be pulled to less than 0.8V.
- RD-/+ : These are the differential receiver outputs. They are internally AC-coupled 100 differential lines which should be terminated with 100Ω (differential) at the user SERDES.
- TD-/+ : These are the differential transmitter inputs. They are internally AC-coupled, differential lines with 100Ω differential termination inside the module.

Digital Diagnostic Functions

Optcore 1.25Gb/s SFP BiDi optical transceiver support the 2-wire serial communication protocol as defined in the SFP MSA. It is very closely related to the E2PROM defined in the GBIC standard, with the same electrical specifications. The standard SFP serial ID provides access to identification information that describes the transceiver's capabilities, standard interfaces, manufacturer, and other information.

Additionally, Optcore 1.25Gb/s SFP BiDi optical transceiver provide an optional enhanced digital diagnostic monitoring interface, which allows real-time access to device operating parameters such as **transceiver temperature, laser bias current, transmitted optical power, received optical power and transceiver supply voltage**. It also defines a sophisticated system of alarm and warning flags, which alerts end-users when particular operating parameters are outside of a factory set normal range.

The SFP MSA defines a 256-byte memory map in E2PROM that is accessible over a 2-wire serial interface at the 8 bit address 1010000X (A0h). The digital diagnostic monitoring interface makes use of the 8 bit address 1010001X (A2h), so the originally defined serial ID memory map remains unchanged. The interface is identical to, and is thus fully backward compatible with both the GBIC Specification and the SFP Multi Source Agreement.

The operating and diagnostics information is monitored and reported by a Digital Diagnostics Transceiver Controller (DDTC) inside the transceiver, which is accessed through a 2-wire serial interface. When the serial protocol is activated, the serial clock signal (SCL, Mod Def 1) is generated by the host. The positive edge clocks data into the SFP transceiver into those segments of the E2PROM that are not write-protected. The negative edge clocks data from the SFP transceiver module. The serial data signal (SDA, Mod Def 2) is bi-directional for serial data transfer. The host uses SDA in conjunction with SCL to mark the start and end of serial protocol activation. The memories are organized as a series of 8-bit data words that can be addressed individually or sequentially.

Digital diagnostics for this 1.25G SFP BiDi optical transceiver is internally calibrated by default.


The 1G BiDi SFP transceivers can be used in host systems that require either internally or externally calibrated digital diagnostics.

Parameter	Symbol	Units	Min.	Max.	Accuracy	Note
Transceiver temperature	D _{Temp-E}	°C	-45	+90	±5°C	1
Transceiver supply voltage	D _{Voltage}	V	2.8	4.0	±3%	
Transmitter bias current	D _{Bias}	mA	2	80	±10%	2
Transmitter output power	D _{Tx-Power}	dBm	-2	9	±3dB	
Receiver average input power	D _{Rx-Power}	dBm	-37	0	±3dB	


Notes:

1. When Operating temp.=0~70 °C, the range will be min=-5,Max=+75
2. The accuracy of the Tx bias current is 10% of the actual current from the laser driver to the laser
3. Internal/ External Calibration compatible.

Typical Interface Circuit

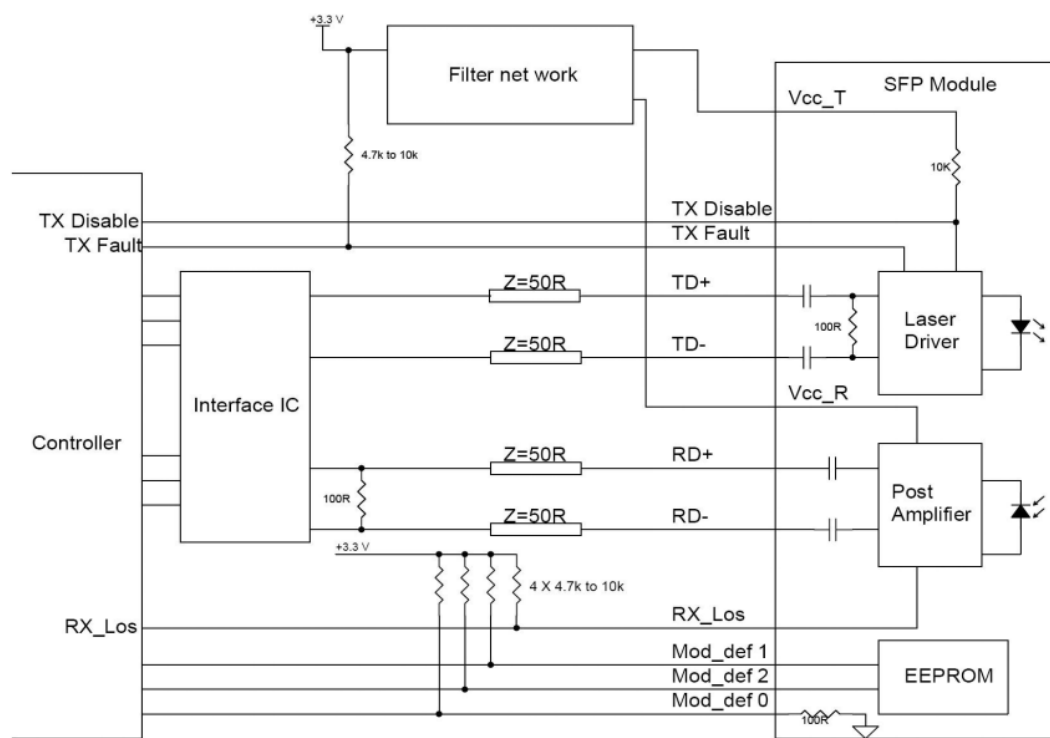

Mechanical Dimensions

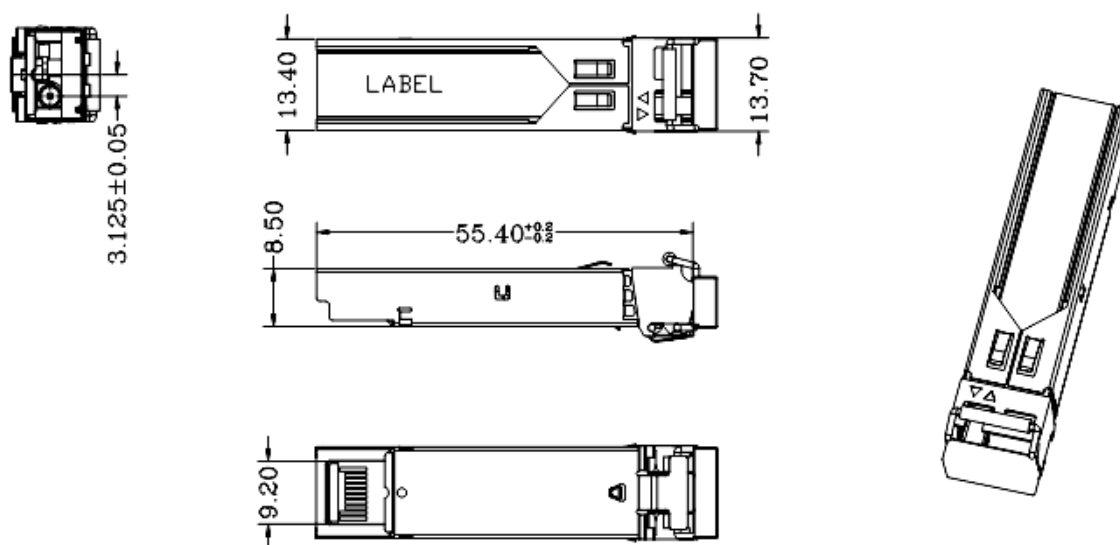

Units in mm

Tolerance without indication is $\pm 0.1\text{mm}$

Ordering information

Part number	Description
OPB1250-45A6DCR	1.25G BiDi SFP Transceiver, SMF, 1490nm-TX/1550nm-RX, 160km, LC, DDM, $0^{\circ}\text{C}\sim+70^{\circ}\text{C}$
OPB1250-54A6DCR	1.25G BiDi SFP Transceiver, SMF, 1550nm-TX/1490nm-RX, 160km, LC, DDM, $0^{\circ}\text{C}\sim+70^{\circ}\text{C}$
OPB1250-45A6DTR	1.25G BiDi SFP Industrial Transceiver, SMF, 1490nm-TX/1550nm-RX, 160km, LC, DDM, $-40^{\circ}\text{C}\sim+85^{\circ}\text{C}$
OPB1250-54A6DTR	1.25G BiDi SFP Industrial Transceiver, SMF, 1550nm-TX/1490nm-RX, 160km, LC, DDM, $-40^{\circ}\text{C}\sim+85^{\circ}\text{C}$

Warnings

Process plug

The transceiver optics is supplied with a dust cover. This plug protects the transceiver optics during standard manufacturing processes by preventing contamination from air borne particles. It is recommended that the dust cover remain in the transceiver whenever an optical fiber connector is not inserted.

Handling Precautions

The transceiver optics is susceptible to damage as a result of electrostatic discharge (ESD). A static free environment is highly recommended. Follow guidelines according to proper ESD procedures.

Laser Safety

The transceiver optics is a Class 1 laser product per international standard IEC 60825-1. Radiation emitted by laser devices can be dangerous to human eyes. Avoid eye exposure to direct or indirect radiation.

Appendix A. Document Revision

Version No	Date	Description
DS/V180227/EN	2018-02-27	Preliminary datasheet
DS/V2.0/EN	2024-10-23	Delete Non-DDM and extend temperature P/N

For more product information, visit us on the web at www.optcore.net



DS/V2.07/EN Copyright © 2024 Optcore Technology Co.,Ltd. All rights reserved. Optcore, Optcore logo are registered trademarks of Optcore Technology Co.,Ltd. All other brands, product names, or trademarks mentioned are the property of their respective owners. Specifications and product availability are subject to change without notice. Optcore assumes no responsibility for inaccuracies contained herein.

