

## OPT84-3140xxxR

84Mbps TTL 1x9 Optical Transceiver, Single Mode, 1310nm, 40km, Duplex SC/ST/FC

### Features

- SC/ST/FC receptacle optical interface
- Single +3.3V or +5V Power Supply
- 1x9 footprint package
- TTL Inputs & Outputs
- Operating wavelength 1310nm
- Super low power consumption design, applied to some special require
- Data rate up to 84Mbps
- TTL Signal Detection Output
- RoHS Compliance
- Operating case temperature:
  - Standard: 0 to +70°C
  - Extended: -10 to +85°C
  - Industrial: -40 to +85°C



### Applications

- SONET/SDH Equipment Interconnect

### Description

The OPT84-3140xxxR family of 1×9 optical transceivers from Optcore provide the network system designer and manufacturers with products to implement a range of SONET/SDH equipment designs at the low data rate of 84Mbps. This series fiber optic transceivers are all supplied in the industry standard 1×9 SIP package style with a duplex SC, ST, FC connector interface. They are high performance, cost effective optical transceiver modules with TTL data interface that supporting data-rate of 84Mbps and 40km transmission distance over single mode fiber cable (SMF). The OPT84-3140xxxR series TTL 1×9 optical transceivers help you convert copper signals to optical fiber. They are usually used for long distance data communications over fiber such as ATM/SONET/SDH applications.

The 84Mbps 1x9 40km transceiver is provided with 3 types operating temperature for different applications:

- Standard type (0~70°C) for commonly commercial application, provided with the lowest cost
- Extended type (-10~85°C) for extended temperature application, provides wider operating temperature
- Industrial grade(-40~85°C) is made with robust and reliable components, to meet the needs of Industrial application under hardened environmental conditions.

### Absolute Maximum Ratings

| Parameter           | Symbol     | Min | Max | Unit |
|---------------------|------------|-----|-----|------|
| Supply Voltage      | Vcc (3.3V) | 0   | 4.0 | V    |
|                     | Vcc(5V)    | 0   | 6.0 | V    |
| Storage Temperature | Ts         | -40 | +85 | °C   |
| Operating Humidity  | -          | 5   | 95  | %    |

**Recommended Operating Conditions**

| Parameter                  |            | Symbol                           | Min  | Typical | Max  | Unit |
|----------------------------|------------|----------------------------------|------|---------|------|------|
| Operating Case Temperature | Standard   | T <sub>c</sub>                   | 0    |         | +70  | °C   |
|                            | Extended   |                                  | -10  |         | +85  | °C   |
|                            | Industrial |                                  | -40  |         | +85  | °C   |
| Power Supply Voltage       |            | V <sub>cc</sub>                  | 4.75 | 5.0     | 5.25 | V    |
|                            |            | V <sub>cc</sub>                  | 3.14 | 3.3     | 3.47 | V    |
| Power Supply Current       |            | I <sub>TX</sub> +I <sub>RX</sub> |      | 150     | 250  | mA   |
| Data Rate                  |            |                                  | 2    |         | 84   | Mbps |


**Optical Characteristics**

| Parameter            | Symbol           | Min  | Typical | Max  | Unit | Notes |
|----------------------|------------------|------|---------|------|------|-------|
| <b>Transmitter</b>   |                  |      |         |      |      |       |
| Centre Wavelength    | $\lambda$        | 1260 | 1310    | 1360 | nm   |       |
| Spectral Width       | $\Delta\lambda$  |      |         | 3    | nm   |       |
| Average Output Power | P <sub>out</sub> | -10  | -6      | -3   | dBm  |       |
| Extinction Ratio     | ER               | 10   |         |      | dB   |       |
| <b>Receiver</b>      |                  |      |         |      |      |       |
| Receiver Sensitivity |                  |      |         | -37  | dBm  |       |
| Receiver Overload    |                  | 0    |         |      | dBm  |       |
| LOS De-Assert        | LOS <sub>D</sub> |      |         | -37  | dBm  |       |
| LOS Assert           | LOS <sub>A</sub> | -47  |         |      | dBm  |       |

**Pin Definitions**

| Pin | Signal Name | Remark    | Description  |
|-----|-------------|-----------|--|
| 1   | GNDR        |           | Receiver section grounded                                    |
| 2   | RD          | TTL/LVTTL | Date output of receiver section                              |
| 3   | NC          |           | No connect   |
| 4   | SD          | TTL/LVTTL | Optical alarm of receiver section, low level when no light   |
| 5   | VccR        |           | Positive power of receiver section, normally +5V and 3.3V    |
| 6   | VccT        |           | Positive power of transmitter section, normally +5V and 3.3V |
| 7   | NC          |           | No connect   |
| 8   | TD          | TTL/LVTTL | Date input of transmitter section                            |
| 9   | GNDT        |           | Transmitter section grounded                                 |

## Topview diagram

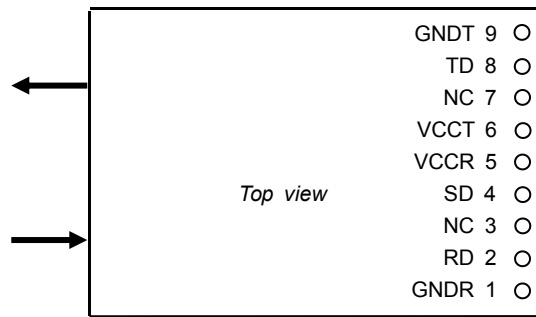

## Mechanical Dimensions

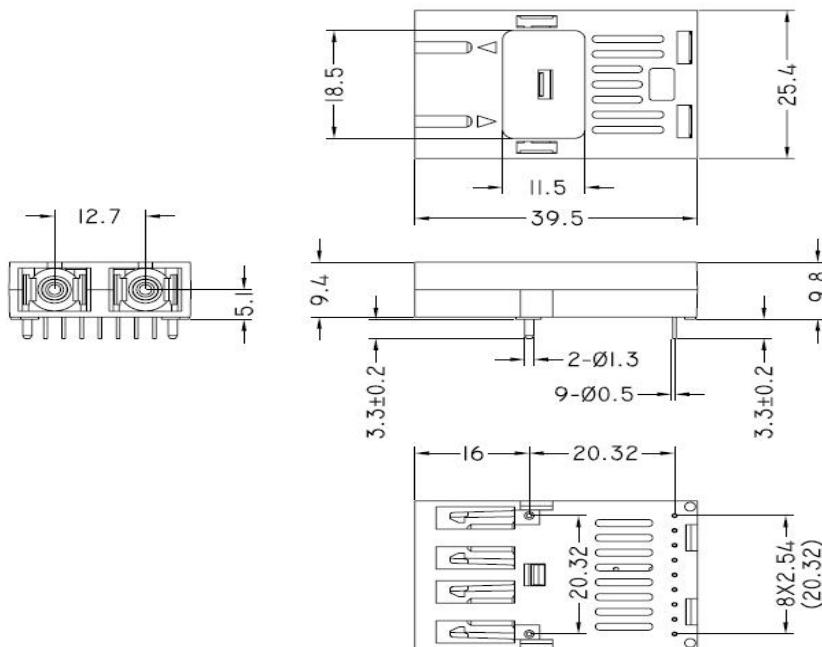


Figure 1. SC Connector

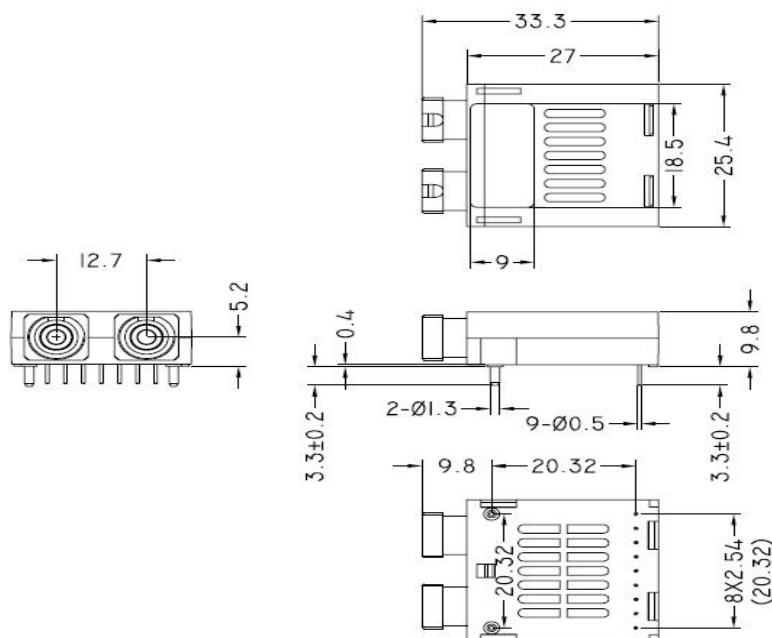


Figure 2. FC Connector

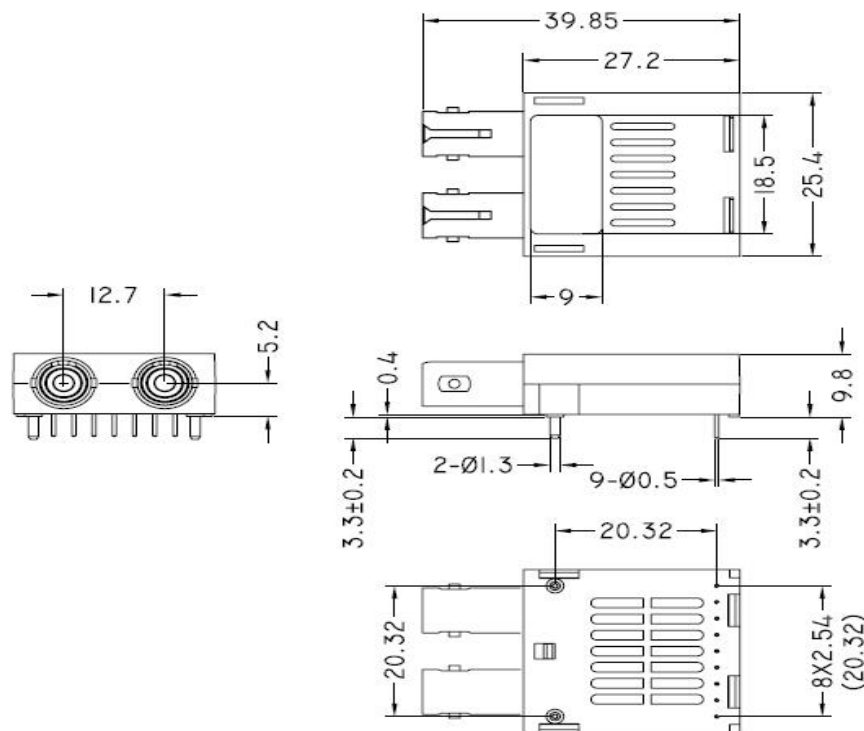


Figure 3. ST Connector

### Ordering information

#### 84Mbps 1x9 TTL Single mode 1310nm 40km Transceiver (Commercial Temperature)

| Part number    | Voltage | Connector         | Operating Temperature |
|----------------|---------|-------------------|-----------------------|
| OPT84-31405SCR | 5V      | Duplex SC         | 0~70 °C               |
| OPT84-31405TCR | 5V      | Duplex ST         | 0~70 °C               |
| OPT84-31405FCR | 5V      | Duplex FC         | 0~70 °C               |
| OPT84-31405PCR | 5V      | Duplex FC pigtail | 0~70 °C               |
| OPT84-31403SCR | 3.3V    | Duplex SC         | 0~70 °C               |
| OPT84-31403TCR | 3.3V    | Duplex ST         | 0~70 °C               |
| OPT84-31403FCR | 3.3V    | Duplex FC         | 0~70 °C               |
| OPT84-31403PCR | 3.3V    | Duplex FC pigtail | 0~70 °C               |

#### 84Mbps 1x9 TTL Single mode 1310nm 40km Transceiver (Extended Temperature)

| Part number    | Voltage | Connector         | Operating Temperature |
|----------------|---------|-------------------|-----------------------|
| OPT84-31405SER | 5V      | Duplex SC         | -10~85 °C             |
| OPT84-31405TER | 5V      | Duplex ST         | -10~85 °C             |
| OPT84-31405FER | 5V      | Duplex FC         | -10~85 °C             |
| OPT84-31405PER | 5V      | Duplex FC pigtail | -10~85 °C             |
| OPT84-31403SER | 3.3V    | Duplex SC         | -10~85 °C             |
| OPT84-31403TER | 3.3V    | Duplex ST         | -10~85 °C             |
| OPT84-31403FER | 3.3V    | Duplex FC         | -10~85 °C             |
| OPT84-31403PER | 3.3V    | Duplex FC pigtail | -10~85 °C             |

### 84Mbps 1x9 TTL Single mode 1310nm 40km Transceiver (Industrial Temperature)

| Part number    | Voltage | Connector         | Operating Temperature |
|----------------|---------|-------------------|-----------------------|
| OPT84-31405STR | 5V      | Duplex SC         | -40~85 °C             |
| OPT84-31405TTR | 5V      | Duplex ST         | -40~85 °C             |
| OPT84-31405FTR | 5V      | Duplex FC         | -40~85 °C             |
| OPT84-31405PTR | 5V      | Duplex FC pigtail | -40~85 °C             |
| OPT84-31403STR | 3.3V    | Duplex SC         | -40~85 °C             |
| OPT84-31403TTR | 3.3V    | Duplex ST         | -40~85 °C             |
| OPT84-31403FTR | 3.3V    | Duplex FC         | -40~85 °C             |
| OPT84-31403PTR | 3.3V    | Duplex FC pigtail | -40~85 °C             |

## Warnings

### Process plug

The transceiver optics is supplied with a dust cover. This plug protects the transceiver optics during standard manufacturing processes by preventing contamination from air borne particles. It is recommended that the dust cover remain in the transceiver whenever an optical fiber connector is not inserted.

### Handling Precautions

The transceiver optics is susceptible to damage as a result of electrostatic discharge (ESD). A static free environment is highly recommended. Follow guidelines according to proper ESD procedures.

### Laser Safety

The transceiver optics is a Class 1 laser product per international standard IEC 60825-1. Radiation emitted by laser devices can be dangerous to human eyes. Avoid eye exposure to direct or indirect radiation.

For more product information, visit us on the web at [www.optcore.net](http://www.optcore.net)



DS/VER180205/EN Copyright © 2018 Optcore Technology Co.,Ltd. All rights reserved.

Optcore, Optcore logo are registered trademarks of Optcore Technology Co.,Ltd. All other brands, product names, or trademarks mentioned are the property of their respective owners. Specifications and product availability are subject to change without notice. Optcore assumes no responsibility for inaccuracies contained herein.

