

OPB155-34(43)20xxR

155Mb/s Bi-Directional SFP Transceiver, SMF, Tx1310/Rx1490nm or Tx1490/Rx1310nm, 20km

Features

- Supports 155Mbps bit rates
- Bi-Directional LC connector
- Hot pluggable SFP footprint
- 1310nm FP laser and 1490nm PIN photo detector
- 1490nm FP laser and 1310nm PIN photo detector
- Applicable for 20km SMF connection
- Low power consumption, < 0.8W
- Compliant with SFP MSA and SFF-8472
- Very low EMI and excellent ESD protection
- ROHS compliant and Lead Free
- Operating Temperature: Standard 0~70°C Extended -10~85°C Industrial -40~85°C
- Optional Digital Diagnostic Monitor Interface



Applications

- Fast Ethernet 100 Mb/s Links
- SDH STM-1
- SONET OC-3
- Other WDM optical transmission systems


Description

Optcore's OPB155-34(43)20xxR is a small form factor pluggable (SFP) Bi-Directional transceiver module for duplex optical data communications such as 100BASE-BX Fast Ethernet and 155Mbps SDH STM-1/SONET OC-3. This BIDI SFP module provides 10km to 20km transmission distance over single strand of single mode fiber. Compared with commonly used dual fiber SFP modules, this bi-directional (BIDI) transceiver allows end users to reduce the total cost on fiber cabling infrastructure by requiring half of fiber cables, providing increased transmission capacity very convenient without installing new fibers.

The transmitter section uses a 1310nm (or 1490nm) FP laser that is a class 1 laser compliant according to International Safety Standard IEC 60825. The receiver section uses a high-speed 1490nm (or 1310nm) InGaAs PIN photodiode (PD) integrated with a trans-impedance preamplifier (TIA). The module is fully compliant with SFP Multi-Sourcing Agreement (MSA) and SFF-8472. For further information, please see SFP MSA and SFF-8472 standard.

There are three versions of the series 155M SFP BIDI optical transceiver modules for different applications. The Standard grade (0~70°C) is for commonly commercial application, the Extended grade (-10~85°C) is for Extended temperature application, and the Industrial grade (-40~85°C) is made with robust and reliable components to meet the needs of Industrial Ethernet application under harsh environmental conditions.

Functional Diagram

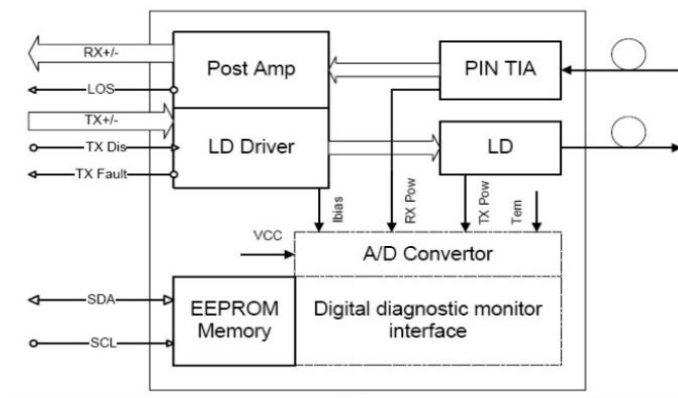

Absolute Maximum Ratings

Parameter	Symbol	Min	Max	Unit	Notes
Maximum Supply Voltage	Vcc	-0.5	4.0	V	
Storage Temperature	T _s	-40	85	°C	
Operating Humidity	RH	5	85	%	

Recommended Operating Conditions

Parameter	Symbol	Min.	Typ.	Max.	Unit	Notes
Power Supply Voltage	Vcc	3.13	3.3	3.47	V	
Power Supply Current	Icc			220	mA	
Case Operating Temperature	T _c	0		70	°C	Standard
		-10		85	°C	Extended
		-40		85	°C	Industrial
Data Rate	DR		155		Mbps	OC-3/STM-1
			100			100M
Transmission Distance		10	15	20	km	9/125μm SMF

Optical Characteristics

Parameter	Symbol	Min.	Typ	Max.	Unit	Note
Transmitter						
Operating Wavelength	λ	1270	1310	1360	nm	OPB155-3420xxR
		1470	1490	1510		OPB155-4320xxR
Ave. output power (Enabled)	P _{AVE}	-13		-8	dBm	1
Extinction Ratio	ER	10			dB	1
RMS spectral width	$\Delta\lambda$			4	nm	
Rise/Fall time (20%~80%)	Tr/Tf			0.26	ns	2
Dispersion penalty	TDP			3.9	dB	
Output Optical Eye	Compliant with IEEE802.3 z (class 1 Laser safety)					
Receiver						
Operating Wavelength	λ	1470	1490	1510	nm	OPB155-3420xxR
		1270	1310	1360		OPB155-4320xxR

Receiver Sensitivity	P_{SEN1}			-30	dBm	3
Overload	P_{AVE}	-3			dBm	3
LOS Assert	P_a	-35			dBm	
LOS De-assert	P_d			-32	dBm	
LOS Hysteresis	$P_d - P_a$	0.5			dB	

Note :


- 1.Measured at 155Mb/s with PRBS 2²³ – 1NRZ test pattern.
- 2.Unfiltered, measured with a PRBS2²³ – 1 test pattern @155Mbps
- 3.Measured at 155Mb/s with PRBS 2²³ – 1 NRZ test pattern for BER < 1x10⁻¹²

Electrical Characteristics (T_{OP(C)} = 0 to 70°C, T_{OP(I)} = -40 to 85°C, V_{CC} = 3.13 to 3.47 V)

Parameter	Symbol	Min.	Typ	Max.	Unit	Note
Transmitter						
Differential data input swing	V _{IN,PP}	120		820	mVpp	1
Tx Disable Input-High	V _{IH}	2.0		V _{CC} +0.3	V	
Tx Disable Input-Low	V _{IL}	0		0.8	V	
Tx Fault Output-High	V _{OH}	2.0		V _{CC} +0.3	V	2
Tx Fault Output-Low	V _{OL}	0		0.8	V	2
Input differential impedance	R _{in}		100		Ω	
Receiver						
Differential data output swing	V _{out,pp}	340	650	800	mVpp	3
Rx LOS Output-High	V _{ROH}	2.0		V _{CC} +0.3	V	2
Rx LOS Output-Low	V _{ROL}	0		0.8	V	2

Notes:

1. TD+/- are internally AC coupled with 100Ω differential termination inside the module.
2. Tx Fault and Rx LOS are open collector outputs, which should be pulled up with 4.7k to 10kΩ resistors on the host board. Pull up voltage between 2.0V and V_{CC}+0.3V.
- 3.RD+/- outputs are internally AC coupled, and should be terminated with 100Ω (differential) at the user SERDES.

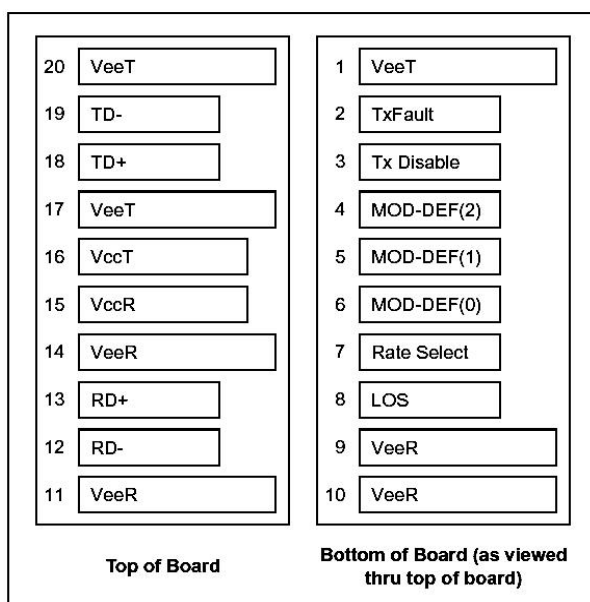Pin Definitions


Pin Descriptions

Pin	Signal Name	Description	Plug Seq.	Notes
1	V _{EET}	Transmitter Ground	1	
2	TX FAULT	Transmitter Fault Indication	3	Note 1
3	TX DISABLE	Transmitter Disable	3	Note 2
4	MOD_DEF(2)	SDA Serial Data Signal	3	Note 3
5	MOD_DEF(1)	SCL Serial Clock Signal	3	Note 3
6	MOD_DEF(0)	Model present indication	3	Note 3
7	Rate Select	Not Connected	3	
8	LOS	Loss of Signal	3	Note 4
9	V _{EER}	Receiver ground	1	
10	V _{EER}	Receiver ground	1	
11	V _{EER}	Receiver ground	1	
12	RD-	Inverse Received Data Out	3	Note 5
13	RD+	Received Data Out	3	Note 5
14	V _{EER}	Receiver ground	1	
15	V _{CCR}	Receiver Power Supply	2	
16	V _{CCT}	Transmitter Power Supply	2	
17	V _{EET}	Transmitter Ground	1	
18	TD+	Transmit Data In	3	Note 6
19	TD-	Inv. Transmit Data In	3	Note 6
20	V _{EET}	Transmitter Ground	1	

Notes:

- TX Fault is an open collector output, which should be pulled up with a 4.7k~10kΩ resistor on the host board to a voltage between 2.0V and V_{cc}+0.3V. Logic 0 indicates normal operation; Logic 1 indicates a laser fault of some kind. In the low state, the output will be pulled to less than 0.8V.
- TX Disable is an input that is used to shut down the transmitter optical output. It is pulled up within the module with a 4.7k~10kΩ resistor. Its states are:
Low (0 to 0.8V): Transmitter on (>0.8V, < 2.0V): Undefined
High (2.0 to 3.465V): Transmitter Disabled Open: Transmitter Disabled
- Mod-Def 0,1,2. These are the module definition pins. They should be pulled up with a 4.7k~10kΩ resistor on the host board. The pull-up voltage shall be V_{ccT} or V_{ccR}.
Mod-Def 0 is grounded by the module to indicate that the module is present
Mod-Def 1 is the clock line of two wire serial interface for serial ID
Mod-Def 2 is the data line of two wire serial interface for serial ID
- LOS is an open collector output, which should be pulled up with a 4.7k~10kΩ resistor. Pull up voltage between 2.0V and V_{cc}+0.3V. Logic 1 indicates loss of signal; Logic 0 indicates normal operation. In the low state, the output will be pulled to less than 0.8V.
- RD-/+: These are the differential receiver outputs. They are internally AC-coupled 100 differential lines which should be terminated with 100Ω (differential) at the user SERDES.
- TD-/+: These are the differential transmitter inputs. They are internally AC-coupled, differential lines with 100Ω

differential termination inside the module.

Digital Diagnostic Functions


Optcore 155Mb/s SFP BiDi optical transceiver support the 2-wire serial communication protocol as defined in the SFP MSA. It is very closely related to the E2PROM defined in the GBIC standard, with the same electrical specifications. The standard SFP serial ID provides access to identification information that describes the transceiver's capabilities, standard interfaces, manufacturer, and other information.

Additionally, Optcore 155Mb/s SFP BiDi optical transceiver provide an optional enhanced digital diagnostic monitoring interface, which allows real-time access to device operating parameters such as **transceiver temperature, laser bias current, transmitted optical power, received optical power and transceiver supply voltage**. It also defines a sophisticated system of alarm and warning flags, which alerts end-users when particular operating parameters are outside of a factory set normal range.


The SFP MSA defines a 256-byte memory map in E2PROM that is accessible over a 2-wire serial interface at the 8 bit address 1010000X (A0h). The digital diagnostic monitoring interface makes use of the 8 bit address 1010001X (A2h), so the originally defined serial ID memory map remains unchanged. The interface is identical to, and is thus fully backward compatible with both the GBIC Specification and the SFP Multi Source Agreement.

The operating and diagnostics information is monitored and reported by a Digital Diagnostics Transceiver Controller (DDTC) inside the transceiver, which is accessed through a 2-wire serial interface. When the serial protocol is activated, the serial clock signal (SCL, Mod Def 1) is generated by the host. The positive edge clocks data into the SFP transceiver into those segments of the E2PROM that are not write-protected. The negative edge clocks data from the SFP transceiver module. The serial data signal (SDA, Mod Def 2) is bi-directional for serial data transfer. The host uses SDA in conjunction with SCL to mark the start and end of serial protocol activation. The memories are organized as a series of 8-bit data words that can be addressed individually or sequentially. Digital diagnostics for this 155M SFP BiDi optical transceiver is internally calibrated by default.

Typical Interface Circuit

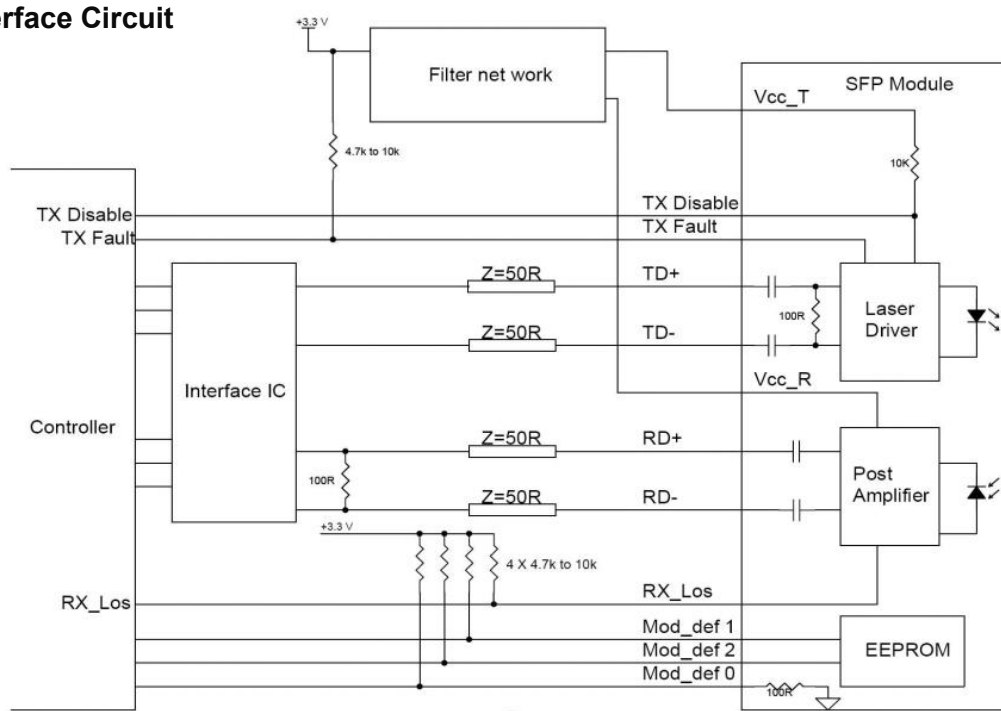

Mechanical Dimensions

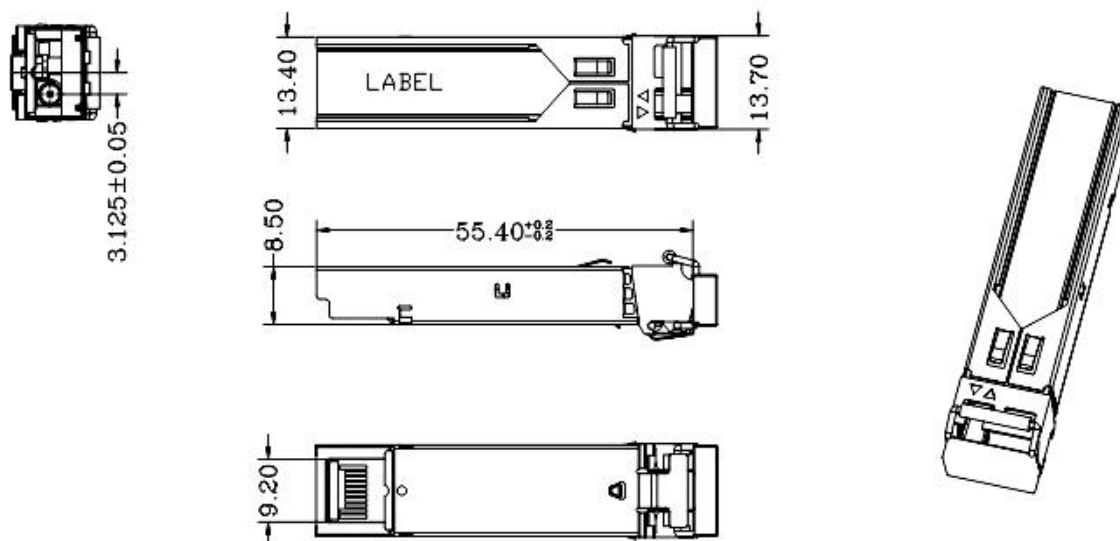

Units in mm

Tolerance without indication is $\pm 0.1\text{mm}$

Ordering information

Part number	Description
OPB155-3420NCR	155M BiDi SFP Transceiver, SMF, Tx:1310nm/Rx:1490nm, 20km, LC, 0°C~+70°C
OPB155-4320NCR	155M BiDi SFP Transceiver, SMF, Tx:1490nm/Rx:1310nm, 20km, LC, 0°C~+70°C
OPB155-3420DCR	155M BiDi SFP Transceiver, SMF, Tx:1310nm/Rx:1490nm, 20km, LC, DDM, 0°C~+70°C
OPB155-4320DCR	155M BiDi SFP Transceiver, SMF, Tx:1490nm/Rx:1310nm, 20km, LC, DDM, 0°C~+70°C
OPB155-3420DER	155M BiDi SFP Transceiver, SMF, Tx:1310nm/Rx:1490nm, 20km, LC, DDM, -10°C~+85°C
OPB155-4320DER	155M BiDi SFP Transceiver, SMF, Tx:1490nm/Rx:1310nm, 20km, LC, DDM, -10°C~+85°C
OPB155-3420DTR	155M BiDi SFP Industrial Transceiver, SMF, Tx:1310nm/Rx:1490nm, 20km, LC, DDM, -40°C~+85°C
OPB155-4320DTR	155M BiDi SFP Industrial Transceiver, SMF, Tx:1490nm/Rx:1310nm, 20km, LC, DDM, -40°C~+85°C

Warnings

Process plug

The transceiver optics is supplied with a dust cover. This plug protects the transceiver optics during standard manufacturing processes by preventing contamination from air borne particles. It is recommended that the dust cover remain in the transceiver whenever an optical fiber connector is not inserted.

Handling Precautions

The transceiver optics is susceptible to damage as a result of electrostatic discharge (ESD). A static free environment is highly recommended. Follow guidelines according to proper ESD procedures.

Laser Safety

The transceiver optics is a Class 1 laser product per international standard IEC 60825-1. Radiation emitted by laser devices can be dangerous to human eyes. Avoid eye exposure to direct or indirect radiation.

For more product information, visit us on the web at www.optcore.net



DS/VER180227/EN Copyright © 2018 Optcore Technology Co.,Ltd. All rights reserved.
Optcore, Optcore logo are registered trademarks of Optcore Technology Co.,Ltd. All other
brands, product names, or trademarks mentioned are the property of their respective
owners. Specifications and product availability are subject to change without notice.
Optcore assumes no responsibility for inaccuracies contained herein.

