

## OPB10G-xx80DxR

10GBASE-BX SFP+ BiDi Transceiver, 1490nm-TX/1550nm-RX or 1550nm-TX/1490nm-RX, 80km

### Features

- Supports 9.95 to 11.3Gb/s bit rates
- Simplex LC Connector
- Hot pluggable SFP+ footprint
- OPB10G-4580DxR: Cooled 1490nm EML transmitter, 1550nm APD receiver
- OPB10G-5480DxR: Cooled 1550nm EML transmitter, 1490nm APD receiver
- Applicable for 80km SMF connection
- Low power consumption < 1.5W
- Digital Diagnostic Monitor Interface
- Optical interface compliant to IEEE 802.3ae 10GBASE-ZR
- Electrical interface compliant to SFF-8431
- ROHS compliant and lead-free
- Operating Temperature: Standard 0~70°C, Industrial -40~85°C

### Applications

- 10GBASE-ZR/10GBASE-ZW Ethernet
- 10G Fibre Channel
- 10G Network interface cards and Fiber Media Converters
- Other Optical Links


### Description

Optcore's OPB10G-xx80DxR series SFP+ BiDi transceiver is a small form factor pluggable Bi-Directional module for optical data communications such as 10GBASE-ZR/ZW defined by IEEE 802.3ae. It is with the SFP+ 20-pin connector to allow hot plug capability. The BiDi SFP+ transceiver is designed for single mode fiber and operates at a nominal wavelength of 1490nm or 1550nm; The transmitter section uses an EML laser, which is class 1 laser compliant according to International Safety Standard IEC-60825. The receiver section consists of an APD photodiode integrated with a TIA. The transceiver designs are optimized for high performance and cost-effectiveness to supply customers with the best telecommunication solutions.

Additionally, the 10GBASE-BX SFP+ 80km transceiver has been integrated with an enhanced digital diagnostic monitoring interface (DDMI) per SFF-8472, which provides real-time monitoring of the transceiver temperature, laser bias current, optical power, received optical power, and transceiver supply voltage. All transceivers are Class 1 laser products that comply with FDA/CDRH and IEC-60825 standards.

There are two versions of the series 10GBASE-BX SFP+ BiDi 80km transceiver. The Standard grade (0~70°C) is for commonly commercial applications, and the Industrial grade (-40~85°C) is made with robust and reliable components to meet the needs of Industrial Ethernet application under harsh environmental conditions.

Transceiver functional diagram

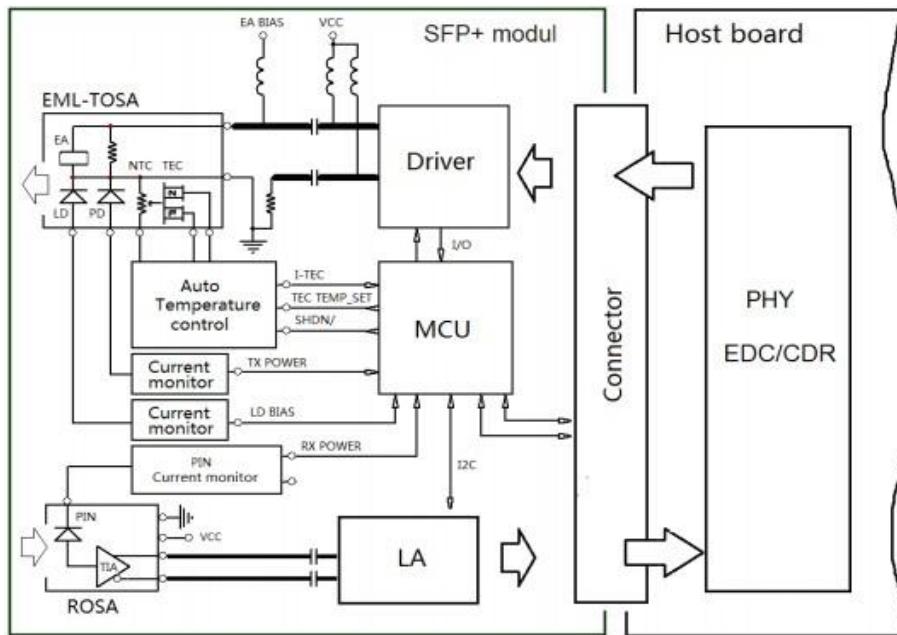

Absolute Maximum Ratings

Parameter	Symbol	Min	Max	Unit	Notes
Maximum Supply Voltage	Vcc	-0.5	4.5	V	
Storage Temperature	T <sub>s</sub>	-40	85	°C	
Operating Humidity	RH	5	85	%	

Recommended Operating Conditions

Parameter	Symbol	Min.	Typ.	Max.	Unit	Notes
Power Supply Voltage	Vcc	3.13	3.3	3.47	V	
Power Supply Current	Icc			450	mA	
Case Operating Temperature	T <sub>c</sub>	0		70	°C	Standard
		-40		85	°C	Industrial
Data Rate		9.95	10.3125	11.3	Gbps	
Maximum Link Length	L <sub>MAX</sub>			80	km	

Optical Characteristics

Parameter	Symbol	Min.	Typ	Max.	Unit	Note
<b>Transmitter</b>						
Operating Wavelength	$\lambda$	1470	1490	1510	nm	OPB10G-4580DxR
		1530	1550	1565		OPB10G-5480DxR
Ave. output power	P <sub>AVE</sub>	0		5.0	dBm	OPB10G-4580DxR
Side-Mode Suppression Ratio	SMSR	30			dB	
Extinction Ratio	ER	7.5	9.0		dB	
RMS spectral width	$\Delta\lambda$			1	nm	

Rise/Fall time (20%~80%)	Tr/Tf			50	ps	
Dispersion penalty	T <sub>DP</sub>			3.2	dB	
Relative Intensity Noise	R <sub>IN</sub>			-128	dB/Hz	
Output Optical Eye	Compliant with IEEE 802.3ae					
<b>Receiver</b>						
Operating Wavelength	λ	1530	1550	1565	nm	OPB10G-4580DxR
		1470	1490	1510		OPB10G-5480DxR
Receiver Sensitivity	P <sub>SEN2</sub>			-23.0	dBm	2
Receive Power Overload	P <sub>AVE</sub>			-7	dBm	3
LOS Assert	Pa	-35			dBm	
LOS De-assert	Pd			-24	dBm	
LOS Hysteresis	Pd-Pa	0.5			dB	

**Note:**

1. Average power figures are informative only, per IEEE 802.3ae.
2. Measured with worst ER=7.5 dB; BER<10<sup>-12</sup>, 2<sup>31</sup>-1 PRBS.
3. When using this SFP+ BiDi ZR transceiver in short-distance transmission, please add a fiber attenuator (≥12dB) to avoid receiver damage and overload.

**Electrical Characteristics**

Parameter	Symbol	Min.	Typ	Max.	Unit	Note
<b>Transmitter</b>						
Differential data input swing	V <sub>IN,PP</sub>	150		1200	mVpp	1
Transmit Disable Voltage	VD	V <sub>CC</sub> -0.8		V <sub>CC</sub>	V	
Transmit Enable Voltage	V <sub>EN</sub>	V <sub>EE</sub>		V <sub>EE</sub> +0.8		
Input differential impedance	R <sub>in</sub>		100		Ω	
<b>Receiver</b>						
Differential data output swing	V <sub>out,pp</sub>	300		850	mVpp	2
Output rise time and fall time	Tr, Tf	28			Ps	3
LOS asserted	V <sub>LOS_F</sub>	V <sub>CC</sub> -0.8		V <sub>CC</sub>	V	4
LOS de-asserted	V <sub>LOS_N</sub>	V <sub>EE</sub>		V <sub>EE</sub> +0.8	V	4

**Notes:**

1. Connected directly to TX data input pins. AC coupling from pins into laser driver IC.
2. Into 100Ω differential termination.
3. 20 – 80%. Measured with Module Compliance Test Board and OMA test pattern. Use of four 1's and four 0's sequence in the PRBS 9 is an acceptable alternative.
4. LOS is an open collector output. Should be pulled up with 4.7kΩ – 10kΩ on the host board. Normal operation is logic 0; loss of signal is logic 1.

**Diagnostics**


Parameter	Range	Unit	Accuracy	Calibration
Temperature	0 to +70	°C	±3°C	Internal
	-40 to +85			
Voltage	3.0 to 3.6	V	±3%	Internal
Bias Current	0 to 15	mA	±10%	Internal
TX Power	-6.0 to -0.5	dBm	±3dB	Internal
RX Power	-16 to -1	dBm	±3dB	Internal

**Digital Diagnostic Memory Map**


The 10GBASE-BX SFP+ 80km transceivers provide serial ID memory contents and diagnostic information about the present operating conditions by the 2-wire serial interface (SCL, SDA).

The diagnostic information with internal calibration or external calibration all are implemented, including received power monitoring, transmitted power monitoring, bias current monitoring, supply voltage monitoring and temperature monitoring.

The digital diagnostic memory map specific data field defines as following.

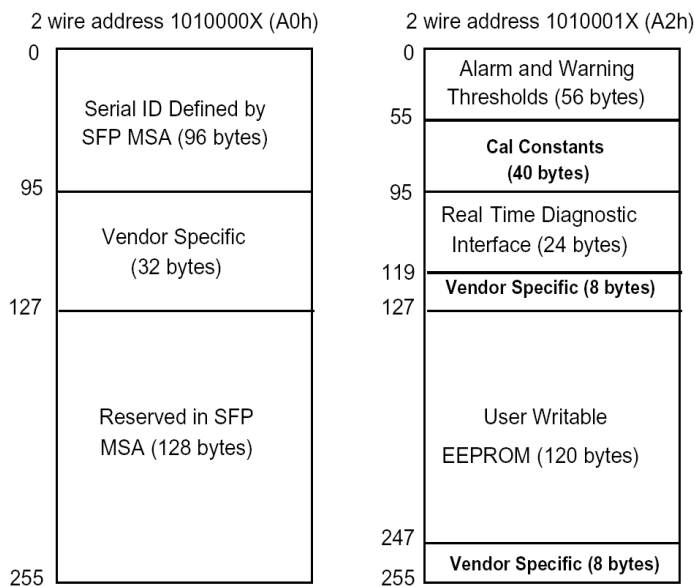

**Pin Definitions**

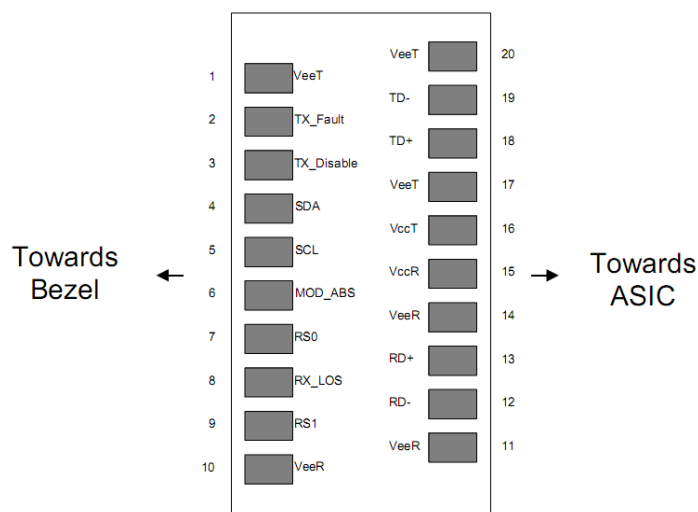

## Pin Descriptions


Pin	Signal Name	Description	Plug Seq.	Notes
1	V <sub>EET</sub>	Transmitter Ground	1	
2	TX FAULT	Transmitter Fault Indication	3	Note 1
3	TX DISABLE	Transmitter Disable	3	Note 2
4	SDA	SDA Serial Data Signal	3	
5	SCL	SCL Serial Clock Signal	3	
6	MOD_ABS	Module Absent. Grounded within the module	3	
7	RS0	Not Connected	3	
8	LOS	Loss of Signal	3	Note 3
9	RS1	Not Connected	3	
10	V <sub>EER</sub>	Receiver ground	1	
11	V <sub>EER</sub>	Receiver ground	1	
12	RD-	Inv. Received Data Out	3	Note 4
13	RD+	Received Data Out	3	Note 4
14	V <sub>EER</sub>	Receiver ground	1	
15	V <sub>CCR</sub>	Receiver Power Supply	2	
16	V <sub>CCT</sub>	Transmitter Power Supply	2	
17	V <sub>EET</sub>	Transmitter Ground	1	
18	TD+	Transmit Data In	3	Note 5
19	TD-	Inv. Transmit Data In	3	Note 5
20	V <sub>EET</sub>	Transmitter Ground	1	

**Notes:**


Plug Seq.: Pin engagement sequence during hot plugging.

1. TX Fault is an open collector output, which should be pulled up with a 4.7k~10kΩ resistor on the host board to a voltage between 2.0V and V<sub>cc</sub>+0.3V. Logic 0 indicates normal operation; Logic 1 indicates a laser fault of some kind. In the low state, the output will be pulled to less than 0.8V.
2. Laser output disabled on TDIS >2.0V or open, enabled on TDIS <0.8V.
3. LOS is open collector output. Should be pulled up with 4.7k~10kΩ on host board to a voltage between 2.0V and 3.6V. Logic 0 indicates normal operation; logic 1 indicates loss of signal.
4. RD-/+ : These are the differential receiver outputs. They are internally AC-coupled 100 differential lines which should be terminated with 100Ω (differential) at the user SERDES.
5. TD-/+ : These are the differential transmitter inputs. They are internally AC-coupled, differential lines with 100Ω differential termination inside the module.

Recommended Interface Circuit

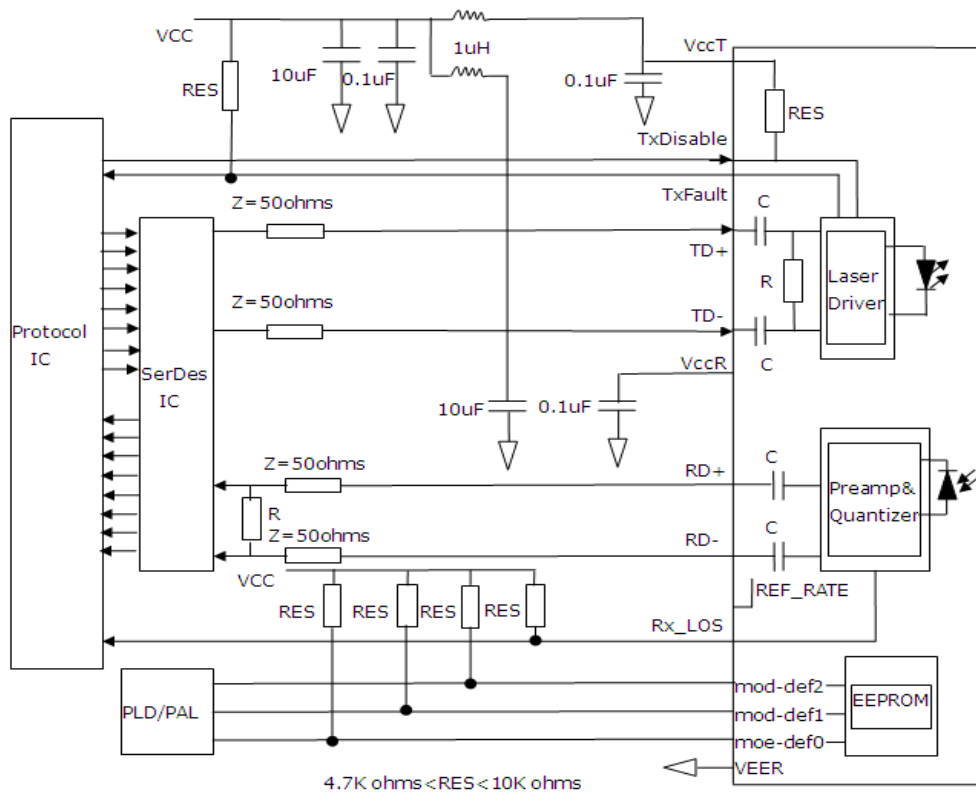

Mechanical Dimensions

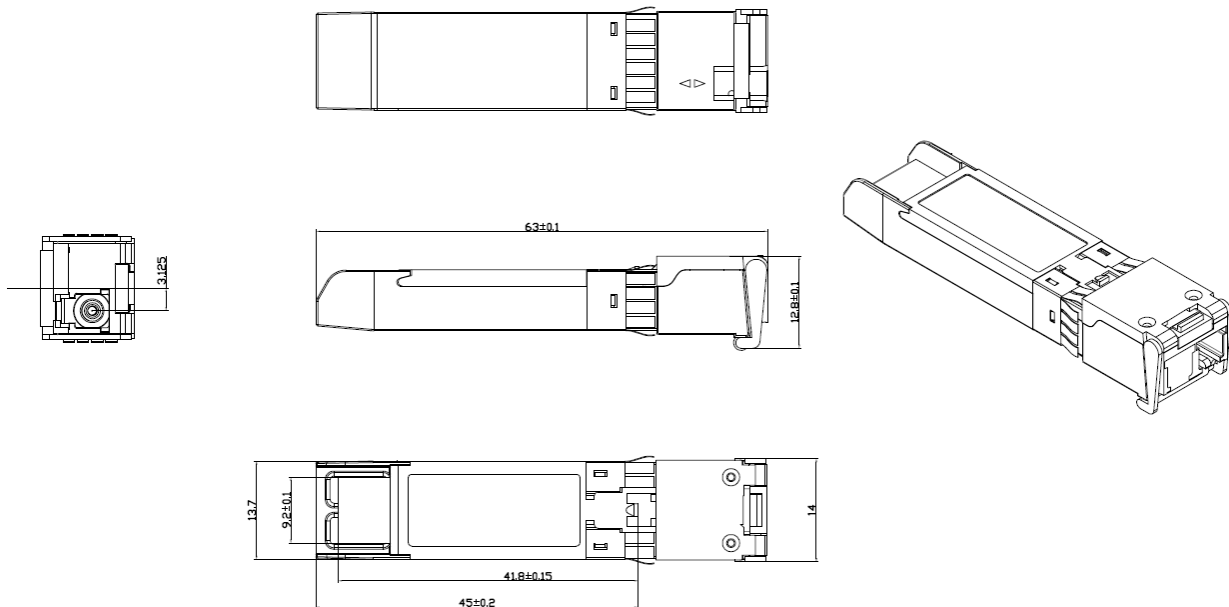

Ordering information

Part number	Description
OPB10G-4580DCR	10GBASE-BX SFP+ Transceiver, 1490nm-TX/1550nm-RX, 80km, LC, DDM, 0°C~+70°C
OPB10G-5480DCR	10GBASE-BX SFP+ Transceiver, 1550nm-TX/1490nm-RX, 80km, LC, DDM, 0°C~+70°C
OPB10G-4580DTR	10GBASE-BX SFP+ Industrial Transceiver, 1490nm-TX/1550nm-RX, 80km, LC, DDM, -40°C~+85°C
OPB10G-5480DTR	10GBASE-BX SFP+ Industrial Transceiver, 1550nm-TX/1490nm-RX, 80km, LC, DDM, -40°C~+85°C

**Warnings**

**Process plug**

The transceiver optics is supplied with a dust cover. This plug protects the transceiver optics during standard manufacturing processes by preventing contamination from air borne particles. It is recommended that the dust cover remain in the transceiver whenever an optical fiber connector is not inserted.

**Handling Precautions**

The transceiver optics is susceptible to damage as a result of electrostatic discharge (ESD). A static free environment is highly recommended. Follow guidelines according to proper ESD procedures.

**Laser Safety**

The transceiver optics is a Class 1 laser product per international standard IEC 60825-1. Radiation emitted by laser devices can be dangerous to human eyes. Avoid eye exposure to direct or indirect radiation.

**Appendix A. Document Revision**

Version No	Date	Description
DS/V1.0/EN	2018-01-10	Preliminary datasheet
DS/V211028/EN	2021-10-28	Update outline dimension
DS/V3.0/EN	2024-10-29	Update Mechanical Dimension, Add document revision

For more product information, visit us on the web at [www.optcore.net](http://www.optcore.net)



DS/V3.0/EN Copyright © 2024 Optcore Technology Co.,Ltd. All rights reserved. Optcore, Optcore logo are registered trademarks of Optcore Technology Co.,Ltd. All other brands, product names, or trademarks mentioned are the property of their respective owners. Specifications and product availability are subject to change without notice. Optcore assumes no responsibility for inaccuracies contained herein.

