

OSP1250-55A6DxR

1.25G SFP Transceiver Module, SMF, 1550nm, 150~160km, LC, DDM



Features

- Support up to 1.25Gb/s data links
- Compliant with SFP MSA standard
- Compliant with IEEE 802.3z
- Hot pluggable SFP footprint
- 1550nm DFB laser transmitter and APD photodiode
- Single 3.3V power supply
- Built-in Digital Diagnostic Monitor Interface
- Duplex LC connector
- Low power dissipation <1.2W
- Metal enclosure provides lower EMI
- RoHS compliant and lead-free
- Operating Temperature: Standard 0~70°C, Industrial -40~85°C

Applications

- 1G Fiber Channel, Switch to Switch Interface
- Gigabit Ethernet, Switched Backplane Applications
- Broadband aggregation and wireless infrastructure
- Router/Server Interface
- Other Optical networking

Description

Optcore OSP1250-55A6DxR is high performance and cost-effective small form-factor pluggable (SFP) transceiver module for 1000BASE-EZX160 Gigabit Ethernet per IEEE802.3z and 1G Fiber Channel application. It supports a dual data rate of 1.25Gbps/1.06Gbps and 150km~160km transmission distance with 9/125μm single mode fiber. This 1.25G SFP EZX160 transceiver module fully complies with the SFP Multi-Sourcing Agreement (MSA) and can be used on MSA compliant SFP ports of optical networking equipment. The transmitter section uses a 1550nm DFB laser that is a class 1 laser product compliant according to International Safety Standard IEC 60825. The receiver section uses a high-speed APD photodiode integrated with a trans-impedance preamplifier (TIA). This series 1G SFP EZX160 transceiver provides two versions for different applications.

- The standard commercial-grade SFP transceiver (OSP1250-55A6DCR) supports operating temperature 0~70° for commercial applications and at a lower cost.
- The Industrial grade SFP transceiver (OSP1250-55A6DTR) supports operating temperature -40~85°C. It is made with robust and reliable components to meet the needs of Industrial Ethernet application under harsh industrial environmental conditions, such as industrial automation, government, rail, and intelligent transportation systems (ITSs), military, oil and gas, mining, and outdoor applications.

Absolute Maximum Ratings

Parameter	Symbol	Min	Max	Unit	Notes
Maximum Supply Voltage	V _{cc}	-0.5	4.0	V	
Storage Temperature	T _s	-40	85	°C	
Operating Humidity	RH	5	95	%	

Recommended Operating Conditions

Parameter	Symbol	Min.	Typ.	Max.	Unit	Notes
Power Supply Voltage	V _{cc}	3.13	3.3	3.47	V	
Power Supply Current	I _{cc}			350	mA	
Case Operating Temperature	T _c	0		70	°C	Standard
		-40		85	°C	Industrial
Data Rate			1.25		Gbps	Gigabit Ethernet
			1.06		Gbps	Fiber Channel
Transmission Distance				160	km	9/125μm SMF

Optical Characteristics

Parameter	Symbol	Min.	Typ.	Max.	Unit	Notes
Transmitter						
Center Wavelength	λ _c	1530	1550	1570	nm	
Average Output Power	P _{out}	2		6	dBm	1
Spectral Width (RMS)	Σ			1	nm	
Extinction Ratio	ER	9			dB	1

Optical Rise/Fall Time	Tr-Tf			0.26	ns	2
Total Jitter				0.431	UI	
Output Optical Eye	Compliant with IEEE802.3 z (class 1 laser safety)					
Receiver						
Center Wavelength	λ_c	1270	-	1610	nm	
Receiver Sensitivity				-34	dBm	3, 4
Receiver Overload		-9			dBm	3
LOS De-Assert	LOSD			-36	dBm	
LOS Assert	LOSA	-40			dBm	
LOS Hysteresis		0.5		6	dB	


Note :

1. Measured at 1.25Gbps with PRBS 2^7-1 NRZ test pattern.
2. Unfiltered, measured with a PRBS 2^7-1 test pattern @1.25Gbps
3. Measured at 1250 Mb/s with PRBS 2^7-1 NRZ test pattern for BER < 1×10^{-12}

Electrical Input/Output Characteristics

Parameter	Symbol	Min.	Typ.	Max.	Unit	Notes
Transmitter						
Input differential impedance	Z_{IN}		100		Ω	
Data Input Swing Differential	$V_{in,pp}$	300		1600	mV	
TX Disable - High	V_{IH}	2.0		$V_{CC}+0.3$	V	
TX Disable - Low	V_{IL}	0		0.8	V	
TX Fault - High	V_{OH}	2.0		$V_{CC}+0.3$	V	
TX Fault - Low	V_{OL}	0		0.5	V	
Receiver						
Data Output Swing Differential	$V_{out,pp}$	400		1000	mV	
RX LOS - High	V_{LOS}	2.0		$V_{CC}+0.3$	V	
RX LOS - Low	V_{LOS}	0		0.8	V	

Pin Definitions

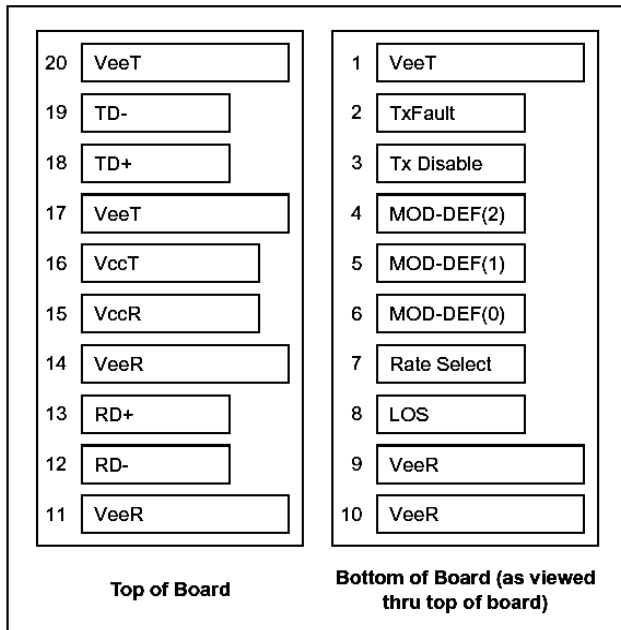

Pin Descriptions

Pin	Signal Name	Description	Plug Seq.	Notes
1	V _{EET}	Transmitter Ground	1	
2	TX FAULT	Transmitter Fault Indication	3	Note 1
3	TX DISABLE	Transmitter Disable	3	Note 2
4	MOD_DEF(2)	SDA Serial Data Signal	3	Note 3
5	MOD_DEF(1)	SCL Serial Clock Signal	3	Note 3
6	MOD_DEF(0)	Model present indication	3	Note 3
7	Rate Select	Not Connected	3	
8	LOS	Loss of Signal	3	Note 4
9	V _{EER}	Receiver ground	1	
10	V _{EER}	Receiver ground	1	
11	V _{EER}	Receiver ground	1	
12	RD-	Inverse Received Data Out	3	Note 5
13	RD+	Received Data Out	3	Note 5
14	V _{EER}	Receiver ground	1	
15	V _{CCR}	Receiver Power Supply	2	
16	V _{CCT}	Transmitter Power Supply	2	
17	V _{EET}	Transmitter Ground	1	
18	TD+	Transmit Data In	3	Note 6
19	TD-	Inv. Transmit Data In	3	Note 6
20	V _{EET}	Transmitter Ground	1	

Notes:

1. TX Fault is an open collector output, which should be pulled up with a 4.7k~10kΩ resistor on the host board to a voltage between 2.0V and V_{cc}+0.3V. Logic 0 indicates normal operation; Logic 1 indicates a laser fault of some kind. In the low state, the output will be pulled to less than 0.8V.

2. TX Disable is an input that is used to shut down the transmitter optical output. It is pulled up within the module with a 4.7k~10kΩ resistor. Its states are:
Low (0 to 0.8V): Transmitter on (>0.8V, < 2.0V): Undefined
High (2.0 to 3.465V): Transmitter Disabled Open: Transmitter Disabled
3. Mod-Def 0,1,2. These are the module definition pins. They should be pulled up with a 4.7k~10kΩ resistor on the host board. The pull-up voltage shall be VccT or VccR.
Mod-Def 0 is grounded by the module to indicate that the module is present
Mod-Def 1 is the clock line of two wire serial interface for serial ID
Mod-Def 2 is the data line of two wire serial interface for serial ID
4. LOS is an open collector output, which should be pulled up with a 4.7k~10kΩ resistor. Pull up voltage between 2.0V and Vcc+0.3V. Logic 1 indicates loss of signal; Logic 0 indicates normal operation. In the low state, the output will be pulled to less than 0.8V.
5. RD-/+: These are the differential receiver outputs. They are internally AC-coupled 100 differential lines which should be terminated with 100Ω (differential) at the user SERDES.
6. TD-/+: These are the differential transmitter inputs. They are internally AC-coupled, differential lines with 100Ω differential termination inside the module.


Digital Diagnostic Functions

Optcore 1.25Gb/s SFP EZX160 optical transceiver supports the 2-wire serial communication protocol as defined in the SFP MSA. It is very closely related to the EEPROM defined in the GBIC standard, with the same electrical specifications. The standard SFP serial ID provides access to identification information that describes the transceiver's capabilities, standard interfaces, manufacturer, and other information.

Optcore 1.25Gb/s SFP EZX160 optical transceiver provides an optional enhanced digital diagnostic monitoring (DDM/DOM) interface. It allows real-time access to device operating parameters such as transceiver temperature, laser bias current, transmitted optical power, received optical power, and transceiver supply voltage. It also defines a sophisticated alarm and warning flags system, which alerts end-users when particular operating parameters are outside of a factory set normal range.

Digital diagnostics for this 1.25G SFP EZX160 optical transceiver is internally calibrated by default.

Mechanical Dimensions

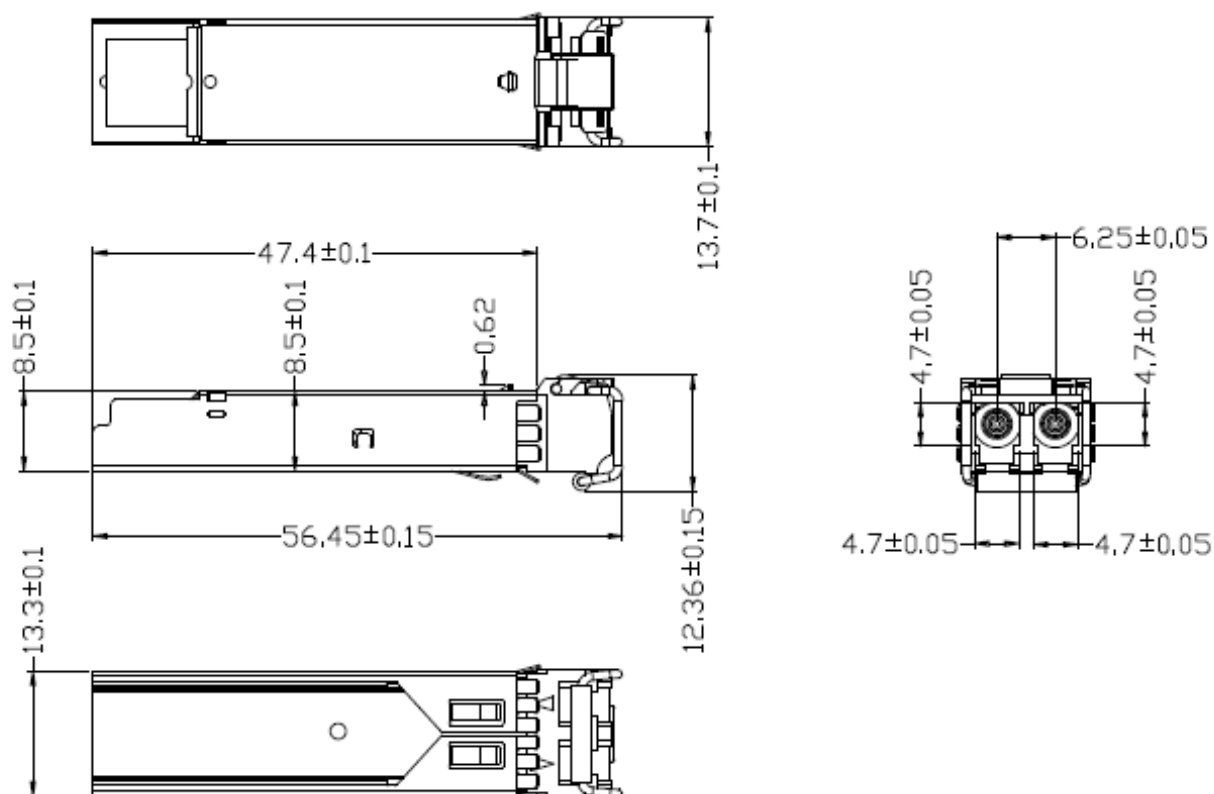

Ordering Information

Part number	Description
OSP1250-55A6DCR	1.25G SFP Transceiver, Singlemode, 1550nm, 160km, LC, DDM, 0°C~+70°C
OSP1250-55A6DTR	1.25G SFP Industrial Transceiver, Singlemode, 1550nm, 160km, LC, DDM, -40°C~+85°C

⚠ Warnings

Process plug

The transceiver module is supplied with a dust cover. This plug protects the transceiver optics during standard manufacturing processes by preventing contamination from air borne particles. It is recommended that the dust cover remain in the transceiver whenever an optical fiber connector is not inserted.

Handling Precautions

The transceiver module is susceptible to damage as a result of electrostatic discharge (ESD). A static free environment is highly recommended. Follow guidelines according to proper ESD procedures.

Laser Safety

The transceiver module is a Class 1 laser product per international standard IEC 60825-1. Radiation emitted by laser devices can be dangerous to human eyes. Avoid eye exposure to direct or indirect radiation.

Appendix A. Document Revision

Version No	Date	Description
DS/V170510/EN	2017-05-10	Preliminary datasheet
DS/V211102/EN	2021-11-02	Update outline dimension
DS/V4.0/EN	2025-04-14	Update Logo, datasheet template, outline dimension and image

For more product information, visit us on the web at www.optcore.net



DS/V4.0/EN Copyright © 2017-2025 Optcore Technology Co.,Ltd. All rights reserved.
Optcore, Optcore logo are registered trademarks of Optcore Technology Co.,Ltd. All other brands, product names, or trademarks mentioned are the property of their respective owners. Specifications and product availability are subject to change without notice. Optcore assumes no responsibility for inaccuracies contained herein.

